


1000Vdc Modular Ferrule Fuse Blocks for Photovoltaic Applications



Modular PV fuse blocks simplify design and installation while reducing footprint

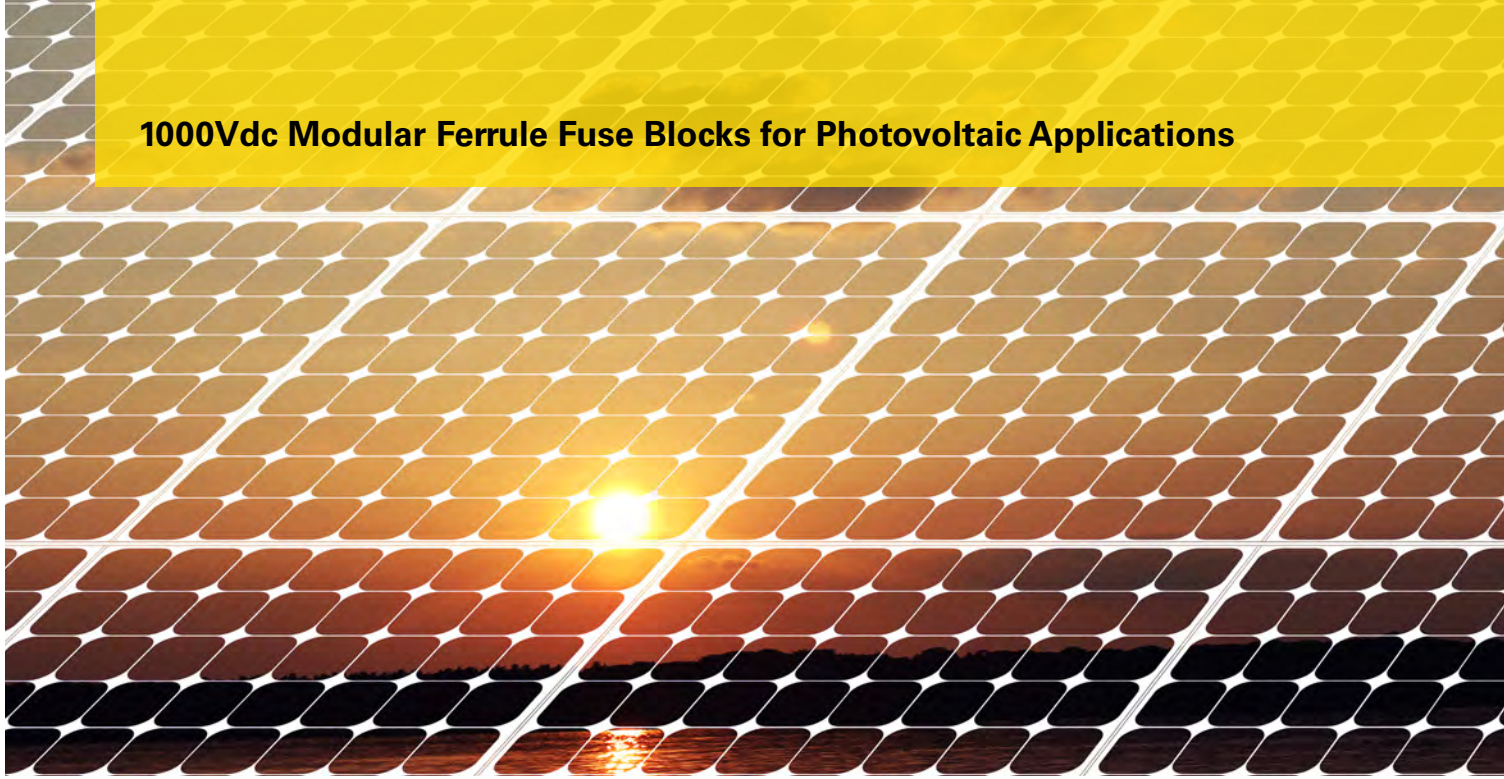

New snap-together photovoltaic ferrule fuse blocks speed up installation, increase flexibility and enhance safety.

Product description:

Bussmann ferrule fuse blocks feature a modular design that allows assembly of the required poles at point of use.

Available for 10x38mm (13/32" x 1-1/2") photovoltaic fuses, these blocks have features and accessories that add versatility, reduce labor and enhance safety of any panel design.

The fuse blocks are available in 1-, 2- and 3-pole configurations and feature the smallest width dimension in the market, consuming minimal panel space.

Features and benefits:

- Modular, snap-together design provides tool-less assembly of multiple pole blocks to save inventory and reduce assembly time.
- DIN-Rail and panel mount versatility allows one product to be used for multiple applications and lowers inventory cost.
- Optional see-through cover enhances safety with IP20 finger-safe protection, lockout/tagout capability and open circuit indication.
- Easy circuit identification with available universal marker labels for fuse block covers.



Bussmann is now a part of Eaton. Same great products plus even more. Learn more at www.eaton.com/cooper.

Bussmann
by **EATON**

Specifications

Ratings:

- Volts 1000V
- Amps up to 30A
- Withstand 33kA RMS Sym

Agency information:

- UL Listed E348242-IZMR
- CSA Certified 47235-6225-01

Flammability ratings:

- Blocks — UL 94V0, self-extinguishing
- Covers — UL 94HB, self-extinguishing

Operating and storage temperature range:

- Blocks -40°C to +120°C
- Non indicating covers -40°C to +120°C
- Indicating covers -20°C to +90°C

Materials:

- Base — Thermoplastic
- Terminals — Tin-plated bimetallic copper
- Covers — Thermoplastic

RoHS

Wire:

- Box lug terminal — Cu/AL, 75/90°C
- All other terminals — Cu, 75/90°C

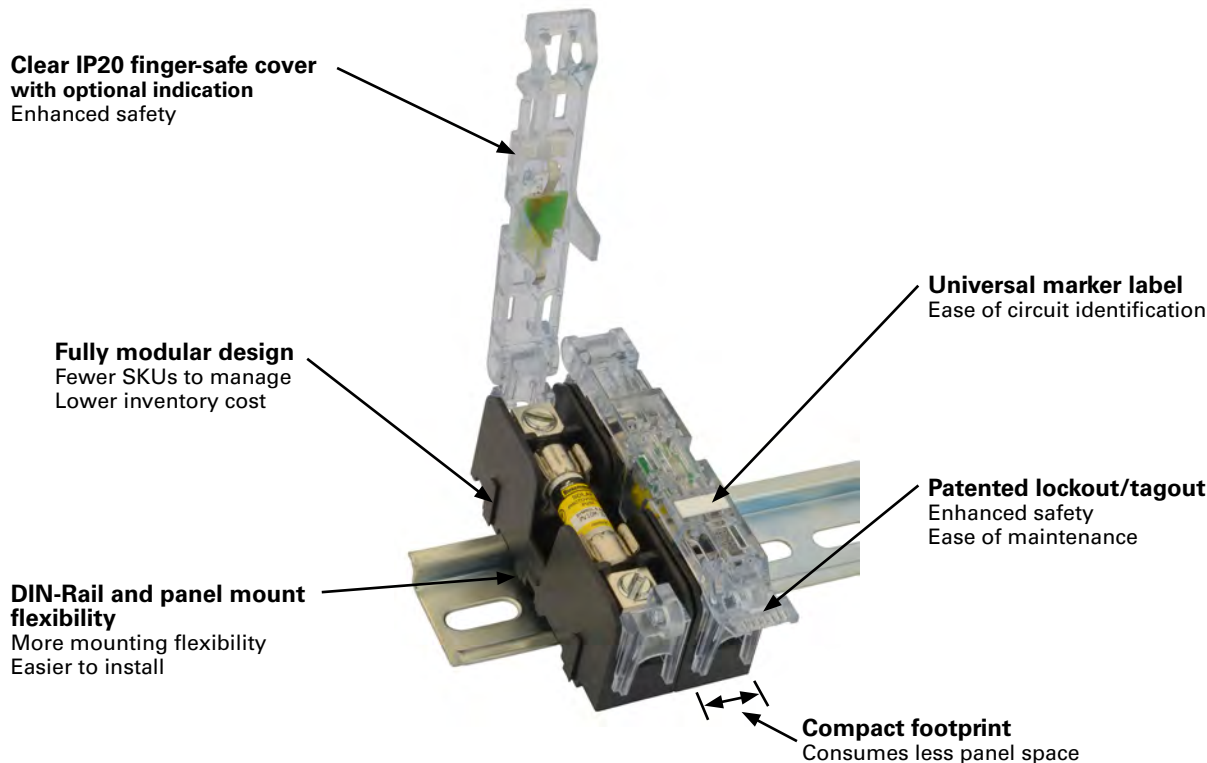


Table 1. Terminal specifications

Terminal type	Wire range	Wire temp rating	Torque AWG	lb-in (N·m)
Box lug ("CR" Option)	CU 2-14, AL 2-8	75/90°C	CU 2-3	50 (5.6)
			CU 4-6	45 (5.1)
			CU 8-14	35 (4.0)
			AL 2-6	50 (5.6)
			AL 8	40 (4.5)
Screw (S)	CU 10-18	75/90°C	10-18	20 (2.3)

Table 2. Recommended covers

Cover part numbers	
Indicating	Non indicating
CVRI-CCM	CVR-CCM

Table 3. Catalog numbers

Terminal type			
#10-32 Phil-slot screw	Box lug	Poles	Fuse class
BPVM-1S	BPVM-1C	1	10x38 (13/32" x 1-1/2") gPV and PV
BPVM-2S	BPVM-2C	2	10x38 (13/32" x 1-1/2") gPV and PV

Eaton's Bussmann Business
114 Old State Road
Ellisville, MO 63021
United States
www.bussmann.com

© 2015 Eaton
All Rights Reserved
Printed in USA
Publication No. 10308
January 2015

Eaton is a registered trademark.

All other trademarks are property of their respective owners.